

Mixer Stands


- Winch Lift -

OWNERS MANUAL

Warranty

Our products are guaranteed against defective materials and workmanship; we will repair or replace such items as may prove defective at our option. Warranty period is one year on items manufactured by INDCO. On items not manufactured by INDCO, the manufacturers warranty applies. All component parts of our products are covered by this warranty, except for normal wear items such as belts or impellers. We cannot be responsible for damage or abuse to equipment caused by improper installation or operation. Warranties can also be voided by unauthorized disassembly of equipment. For warranty repairs, equipment is returned to INDCO at the customer's expense; we will repair and return to customer at our expense. Under no circumstances will we allow labor charges or other expense to repair defective merchandise. This warranty is exclusive and is in lieu of all other warranties, whether express or implied. INDCO shall not be liable for any other damages, whether consequential, indirect, or incidental, arising from the sale or use of its products.

	PSW-BT-BP		
	MIXER LIFT S - Manual Winc		
Model:		I	Page
PSW84-BP PSW84	- stationary - portable "X" Base .		2 3
	- stationary - stationary		4 4
PSW-BT PSW-DL	- portable "Tote" Base - portable "Tote" Base		5 5
Part List			6
vour direct source for INDCO, Inc. 4040 Earning New Albany, phone: 812-5 fax: 812-5 web: www	IN 47150 941-5954 944-9742		

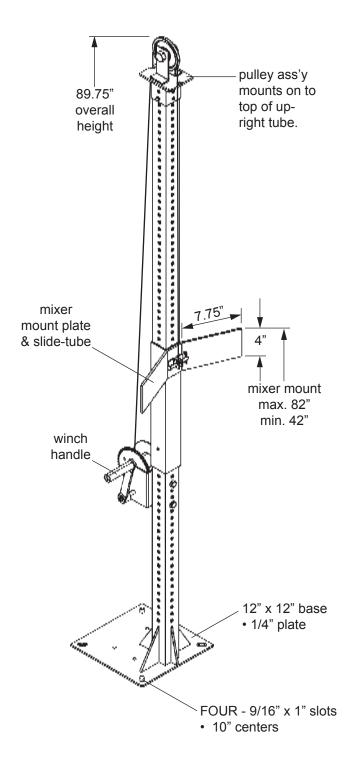


PSW84-BP Stationary Lift Stand


Features:

- Constructed from heavy gauge plate and square tubing, carbon steel - painted.
- · Capacity to hold up to 200 lbs.

Operation:

• Height adjusts using a hand operated winch mounted to the back of up-right tube with cable and pulley assembly. Winch has self-activating brake for safety which will hold the mixer at the desired height when handle is released. Not recommended for hazardous duty locations.

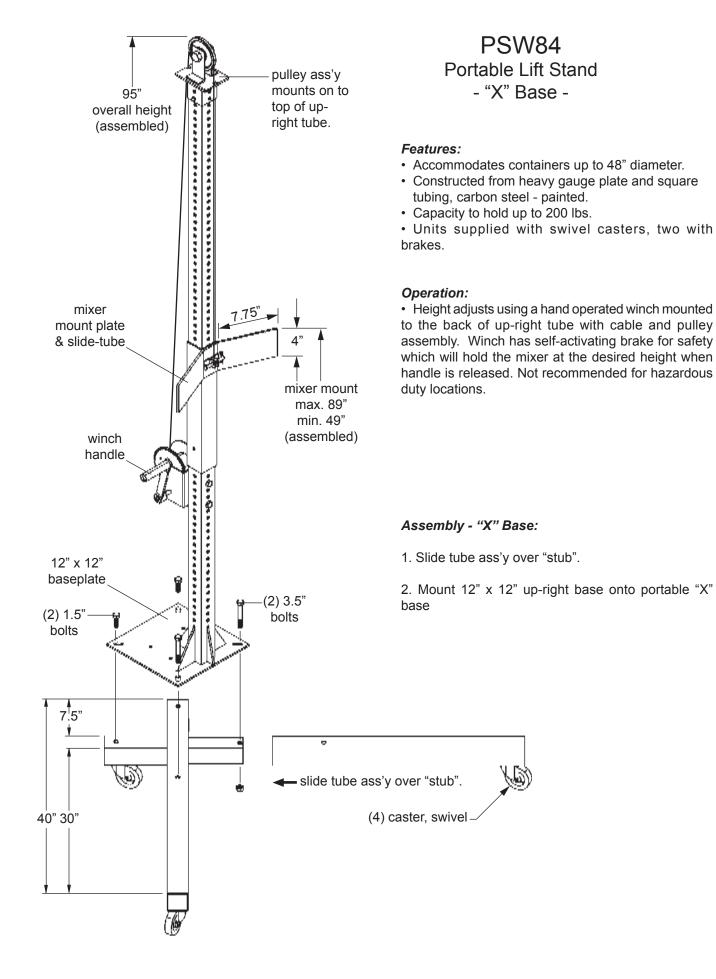

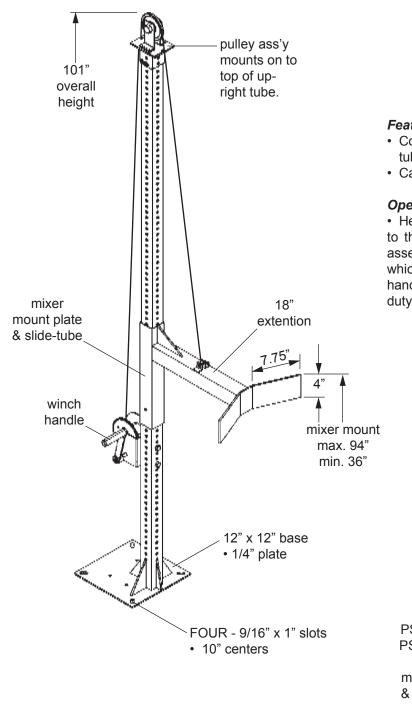


PSW-BT-BP Stationary Lift Stand


Features:

- Constructed from heavy gauge plate and square tubing, carbon steel painted.
- Capacity to hold up to 150 lbs.


Operation:


• Height adjusts using a hand operated winch mounted to the back of up-right tube with cable and pulley assembly. Winch has self-activating brake for safety which will hold the mixer at the desired height when handle is released. Not recommended for hazardous duty locations.



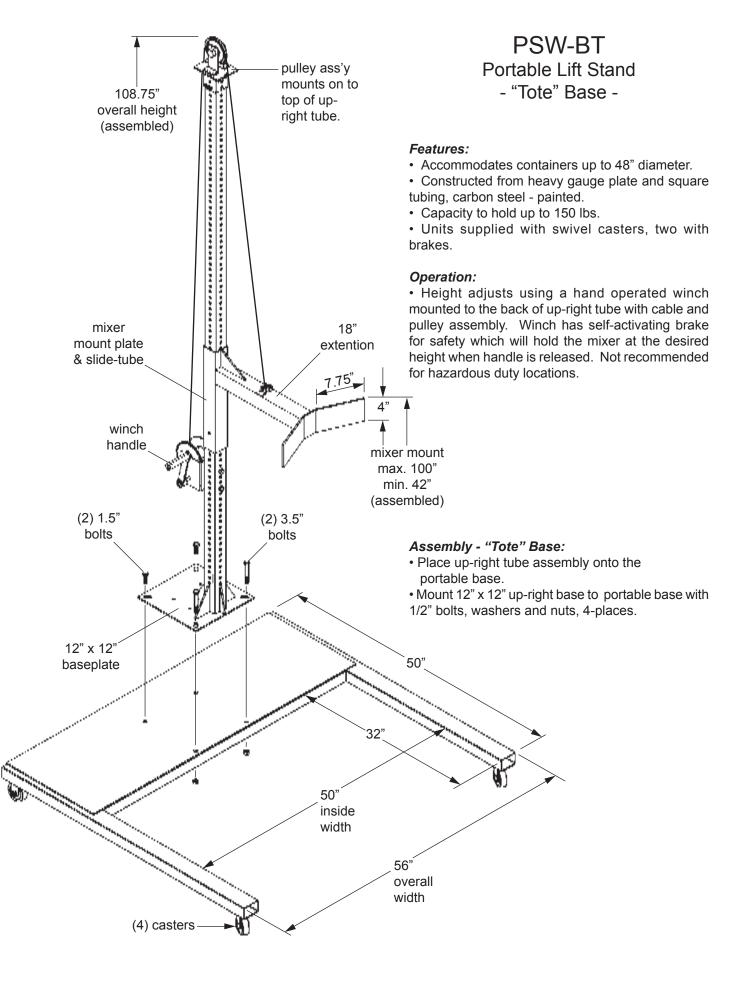

Parts List - Winch Lift Stands

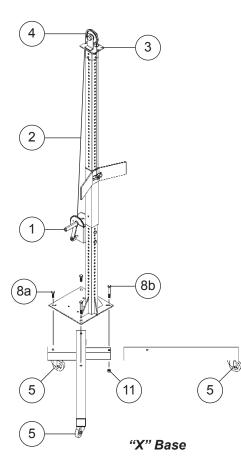

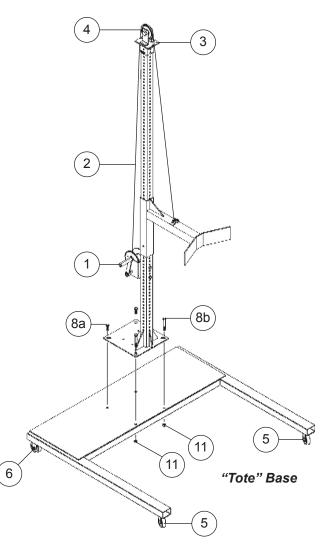

ltem	Description	Part no.	Qty.
•	"X" Base with Casters (complete)	N-X-LIFT-BASE	
1 •	"Tote" Base with Casters (complete)	N-PSBT-BASE	1
1 2	Hand operated winch Lift cable, 3/32" X 12' long	HDW-PSW-WINCH HDW-PSW-CABLE	1 1
3.	Pulley Mount, 1-piece welded, <i>consisting of:</i> - (1) Perforated square tube, 2-1/2" x 3" long - (1) Flat plate, 1/4" x 4" x 5" - (2) Flat plate, 1/8" x 2" x 5"	C-0-NI MET-PSE84-MOTORSTUB MET-PSE84-MOTORPLATE MET-PSA84-VALVEMOUNT	1
4.	Top pulley, 4" diameter, 3/4" bore - nylon	HDW-PSW-PULLEY	1
5. 6. 7.	Caster, swivel - 3" dia. wheel Caster, rigid - 3" dia. wheel Caster brake kit (not shown)	HDW-4X618 HDW-4X622 HDW-4X698	2~4 2 2
8a. 8b. 9. 10.	short Bolt, hex-head - 1/2"-13 x 1.5" long Bolt, hex-head - 1/2"-13 x 3.5" Flat washer - 1/2" (not shown) Lock washer - 1/2" (not shown)	N-HARDWARE N-HARDWARE N-HARDWARE N-HARDWARE	2 2 4 4