



# Performance Curves

## 751 Series Pumps

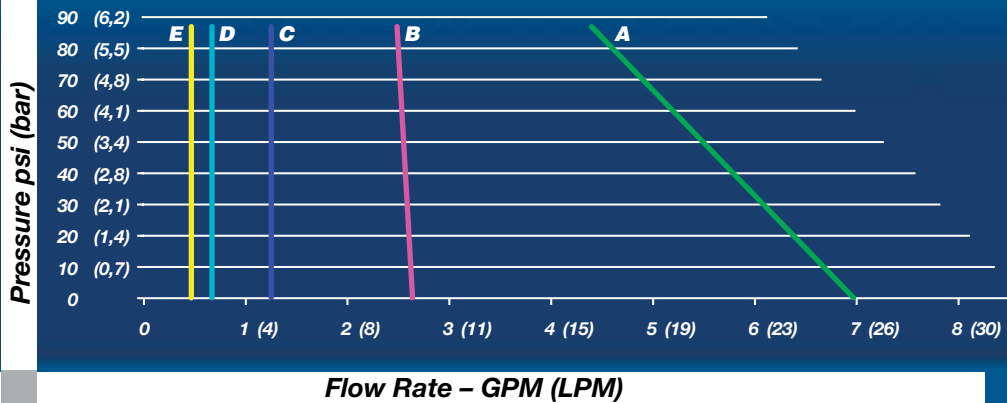


	Viscosity cps (mPas)	Electric HP (KW)	Air HP (KW)
A	1	.75 (.55)	2 (1.5)
B	10,000	.75 (.55)	2 (1.5)
C	30,000	1 (.75)	4 (3)
D	60,000	1 (.75)	4 (3)
E	100,000	1.5 (1.1)	5 (3.7)

## 752 Series Pumps

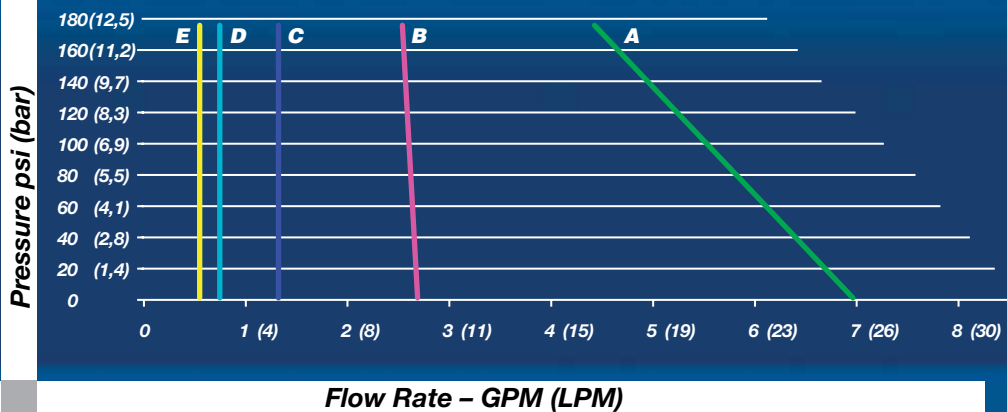

	Viscosity cps (mPas)	Electric HP (KW)	Air HP (KW)
A	1	.75 (.55)	2 (1.5)
B	10,000	.75 (.55)	2 (1.5)
C	30,000	1 (.75)	4 (3)
D	60,000	1 (.75)	4 (3)
E	100,000	1.5 (1.1)	5 (3.7)

## 1851 Series Pumps

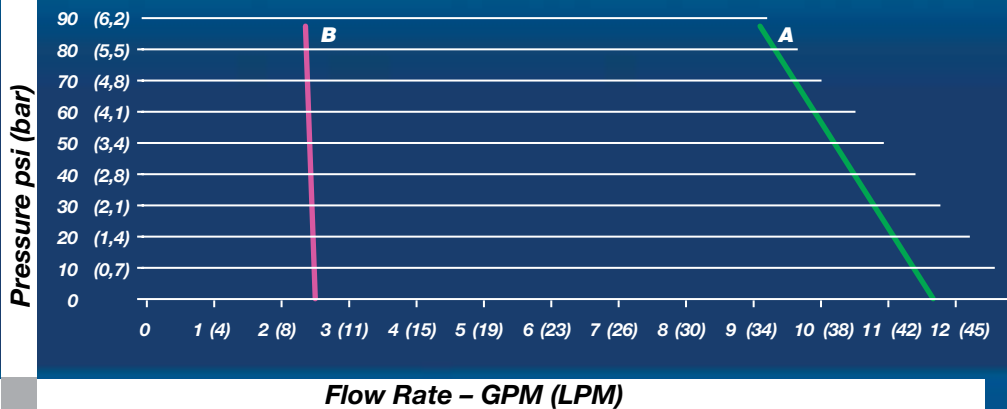

	Viscosity cps (mPas)	Electric HP (KW)	Air HP (KW)
A	1	.75 (.55)	2 (1.5)
B	10,000	.75 (.55)	2 (1.5)

### Technical Notes

- Performance Curves are intended to be used as a guide only as individual results may vary.
- Pump Stator Elastomers (Teflon, Viton or Buna) may vary performance.
- Performance Curves were created using a 900 RPM motor. Reducing motor speed will decrease pump performance. Do NOT increase motor speed above 900 RPM's.
- Pump Curves were created with a Newtonian Polymer (Viscosity remains constant regardless of shear). Non-Newtonian materials (viscosity does not remain constant with shearing) may vary performance.